

REBAR BENDERS • REBAR CUTTERS • REBAR TIERS • CUTTING EDGE SAWS™ • MATERIAL MIXERS • DRYWALL SANDERS • MANUAL TOOLS



UNDER CONSTRUCTION



Tools That Grow Your Business

BN PRODUCTS-USA, LLC.

A Division of Benner-Nawman, Inc.



3450 Sabin Brown Rd
Wickenburg, AZ 85390
Phone (800) 992-3833
mail@bnproducts.com

JOB-SITE GENERATORS • REBAR BENDERS • REBAR CUTTERS • REBAR TIERS • CUTTING EDGE SAWS™ • MATERIAL MIXERS • MANUAL TOOLS



The Cutting Edge Saws™



The Original Cutting Edge Saw™ A multipurpose cutting tool. It can easily cut **rebar**, all-thread rod, chain, EMT conduit, copper pipe, steel rods, steel tubing, and much more. These power hand-held tools are light-weight and feature easy to use handles. The corded models are ETL Listed. All of our Cutting Edge Saws™ are sold complete with two (2) Cutting Edge Blades, handle, a chip collector bag, tools and a manual, all in a nifty molded case.



BNCE-20 Cutting Edge Saw™ (#6 3/4" Rebar)	
Voltage/Amperage	120V 60Hz / 9 amps
Watts	1100W
Blade (2 ea. supplied)	4.375" (110 mm) Tungsten Carbide Tipped
No Load RPM	2,000
Depth of Cut	.860" (21.8 mm)
Length x Width x Height	20.3" (515 mm) x 5.5" (140 mm) x 3.9" (99 mm)
Net Tool Weight	7.6 lbs. (3.5 kg)



BNCE-20-24V Cutting Edge Saw™ (#6 Rebar)	
Power (2 ea. supplied)	24V Lithium-Ion Battery 6.0Ah
Blade (2 ea. supplied)	4.375" (110 mm) Tungsten Carbide Tipped
No Load RPM	2,000
Depth of Cut	.86" (21.8 mm)
Length x Width x Height	17 1/4" (438.2 mm) x 5 1/4" (133 mm) x 3 1/4" (82.6 mm)
Net Tool Weight	7.2 lbs. (3.5 kg)
Charger	Standard 120V Quick Charger



BNCE-30 Cutting Edge Saw (#8 Rebar)	
Voltage/Amperage	120V 60Hz / 9 amps
Watts	1100W
Blade (2 ea. supplied)	5" (127 mm) Tungsten Carbide Tipped
No Load RPM	2,000
Depth of Cut	1.2" (30 mm)
Length x Width x Height	20.3" (515 mm) x 6.1" (155 mm) x 4" (101 mm)
Net Tool Weight	7.7 lbs. (3.5 kg)



BNCE-30-24V Cutting Edge Saw™ (#8 Rebar)	
Power (2 ea. supplied)	24V Lithium-Ion Battery
Blade (2 ea. supplied)	5" (127 mm) Tungsten Carbide Tipped
No Load RPM	2,200
Depth of Cut	1.2" (30 mm) or 1" (25mm) rebar
Length x Width x Height	17 1/4" (438.2 mm) x 5 1/4" (133 mm) x 3 1/4" (82.6 mm)
Net Tool Weight	7.2 lbs. (3.5 kg)
Charger	Standard 120V Quick Charger



BNCE-50 Cutting Edge Saw™	
Voltage / Amperage	120V 60Hz / 9 amps
Watts	1100W
Blade (2 ea. supplied)	7" (178 mm) Tungsten Carbide Tipped
No Load RPM	1800
Depth of Cut	1.75" (44.5 mm)
Length x Width	21.5" (546 mm) x 8.5" (216 mm) 4" (102 mm)
Tool Height	3.9" (99 mm)
Net Tool Weight	11.3 lbs. (5 kg)

Available Replacement Blades:



- **RB-BNCE-NH** ~ Standard Replacement blade for the BNCE-20 and BNCE-20-24V
- **RB-BNCE-MESH** ~ Special Mesh Cutting Blade used for the BNCE-20 and BNCE-20-24V
- **RB-BNCE-30** ~ Standard replacement for the BNCE-30 and BNCE-30-24V
- **RB-BNCE-50** ~ Standard Replacement Blade for the BNCE-50
- **RB-BNCE-50SS** ~ Special Replacement blade for the BNCE-50 (for cutting stainless steel).
- **RB-BNCE-50ST** ~ Special Replacement Blade for the BNCE-50 (for cutting strut).

Cutting Edge Saw™ - Additional Parts:



- **BNCE-24LI** - Replacement 24V Battery for the BNCE-20-24V
- **BNCE-24VCHGR** ~ Replacement Battery Charger for the BNCE-20-24V
- **BNCEP-68** ~ Chip Collector Bag (same for all Cutting Edge Saws)
- **BNCEP-50** ~ Carbon Brushes for the BNCE-20 and the BNCE-50

Portable Rebar Tools

Our Portable Rebar Cutters will safely, efficiently, and cleanly cut rebar with maximum diameters from #5 (5/8") to #10 (1 1/4") grade 60. These are self-contained electric/hydraulic tools. They act as a cold-cutting shear and unlike saws with abrasive blades and cutting torches there are no sparks or flame. A safety relief valve for retracting the piston and a cutting guard are standard features. They ship complete in a durable carrying case along with additional hydraulic oil and a tool kit.




Model Number	DCC-1636BHL (Cordless Model)
Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cuts per battery /Cutting speed	75 cuts on full charge / 3 seconds
Li-ion Battery	36 Volt DC, 3.0Ah
Battery Charger	115 Volt 60 Hz Charger
Tool Weight	14.75 lbs.(6.6 kg) with battery
Dimensions (w/o side handle)	14.75"(374mm) x 4"(101mm) x 12"(240mm)




Model Number	DCC-2036BHL (Cordless Model)
Maximum Cutting Diameter	3/4" #6 Rebar (20mm) Grade 60
Cuts per battery /Cutting speed	75 cuts on full charge / 3 seconds
Li-ion Battery	36 Volt DC, 3.0Ah
Battery Charger	115 Volt 60 Hz Charger
Tool Weight	21 lbs.(9.5 kg) with battery
Dimensions (w/o side handle)	16.5"(419mm) x 4.25"(107mm) x 12"(304mm)



Double Insulated

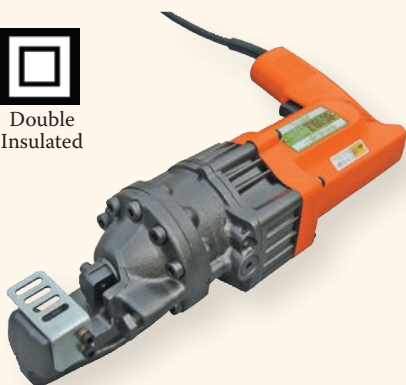

Model Number	DC-16LZ Portable #5 Rebar Cutter
Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting Speed / Pressure	2 Seconds / 13 Tons
Voltage / Amperage	115V 50/60Hz / 9 Amps
Tool Weight	15 lbs. (6.8 kg)
Dimensions L x W x H	14.8" (380mm) x 6.8" (175mm) x 4.1" (105mm)




Model Number	DC-16W Portable #5 Rebar Cutter
Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting Speed / Pressure	2.5 Seconds / 15 Tons
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	17.6 lbs (8 kg)
Dimensions (w/side handle)	18" (460mm) x 10.5" (270mm) x 4.5" (115mm)



Model Number	DC-20WH Portable #6 Rebar Cutter
Maximum Cutting Diameter	3/4" #6 Rebar (19mm) Grade 60
Cutting Speed / Pressure	3 Seconds / 15 Tons
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	25.4 lbs (11.5 kg)
Dimensions L x W x H	16" (410mm) x 4.3" (110mm) x 8.2" (210mm)



Model Number	DC-25X Portable #8 Rebar Cutter
Maximum Cutting Diameter	1" #8 Rebar (25mm) Grade 60
Cutting Speed / Pressure	5 Seconds / 30 Tons
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	49.6 lbs (22.5 kg)
Dimensions L x W x H	20" (515mm) x 5.9" (150mm) x 9.8" (250mm)

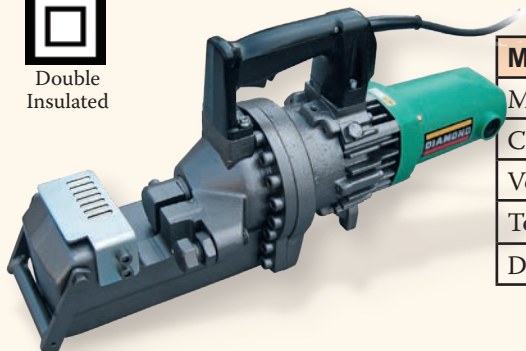

Model Number	DC-32WH Portable #10 Rebar Cutter
Maximum Cutting Diameter	1-1/4" #10 Rebar (32mm) - Grade 60
Cutting Speed / Pressure	7 Seconds / 45 Tons
Voltage / Amperage	115V 50/60Hz / 18 amps
Tool Weight	79 lbs (35.8 kg)
Dimensions L x W x H	23" (591mm) x 7" (180mm) x 10.6" (272mm)

MEDIUM DUTY TOOL



Model Number	BNRC-20 #6 Cutter	BNRC-25X #8 Cutter
Cutting Diameter	3/4" #6 Rebar Grade 60	1" #8 Rebar Grade 60
Cutting Speed / Pressure	3 Seconds / 15 Tons	5 Seconds / 30 Tons
Voltage / Amperage	115V 50/60Hz / 10 amps	115V 50/60Hz / 12 amps
Tool Weight	25.4 lbs (11.5 kg)	49.6 lbs (22.5 kg)
Dimensions L x W x H	16" (410mm) x 4.3" (110mm) x 8.2" (210mm)	20" (515mm) x 5.9" (150mm) x 9.8" (250mm)



Model Number	DBC-16H #5 Rebar Cutter/Bender
Cut / Bend Speed	3 seconds / 180 degree bend in 7 seconds
Bending Roller	2.42" (62 mm) Diameter (R 31)
Clearance (In-place) Cutting	1-3/4" (44.5 mm) from Surface
Clearance (In-place) Bending	4.5" (115 mm) from Surface
Rebar Capacity	Up to #5 (16mm) Grade 60
Voltage/ Amperage	115v, 50/60 Hz -10 amps
Tool Weight	40 lbs. (18.2kg)
Tool Dimensions L x W x H	25-1/8" x 6-3/8" x 8-5/8"



90 degree shoe and collar set

Model Number	HB-16W Hydraulic #5 Rebar Bender
Maximum Bending Diameter	5/8" #5 Rebar (16mm) - Grade 60
Bending Angle / Speed	0 - 135 degrees / 8 Seconds
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	33 lbs (15 kg)
Dimensions L x W x H	22.8" (584mm) x 7.6" (195mm) x 8" (205mm)



Small and large bending die set

Model Number	DBR-25WH Hydraulic #8 Rebar Bender
Maximum Bending Diameter	1" #8 Rebar (25mm) Grade 60
Bending Angle	Up to 94 degrees (1/2") - up to 90 degrees (1")
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	62.3 lbs (28 kg)
Dimensions L x W x H	25.75" (660mm)x 10.5" (270mm)x 7.8" (200mm)



Model Number	DBS-16H In-Place #5 Rebar Bender
Maximum Bending Diameter	5/8" (#5) Rebar (16mm) Grade 60
Bending Angle / Speed	90 Degrees in 4 seconds
Voltage / Amperage	115V 50/60Hz / 8.9 amps
Tool Weight	26.5 lbs (12 kg)
Dimensions L x W x H	18.5" (470mm)x 5,7" (145mm)x 10.7" (270mm)

Mechanical Rebar Benders

Our heavy-duty portable rebar benders helps to save valuable man-hours by bending grade 60 rebar at the job site or in your shop. These strong electrical-mechanical benders have two preset angle locks for repeating the same angle bend. The lever-type angle selector can be set to accurately bend any angle from 0-180 degrees. An emergency stop switch and lifting handles are standard features. Our portable rebar benders come complete with a set of bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending.



Model Number	DBD-16H Portable #5 Rebar Bender
Maximum Bending Diameter	5/8" (#5) Rebar (16mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 5 seconds
Voltage / Amperage	115V 50/60Hz / 9.5 amps
Tool Weight	49 lbs (22.4 kg)
Dimensions L x W x H	21.5" (547mm)x 14.5" (369mm) x 10.5" (267mm)



Model Number	DBD-16X Portable #5 Rebar Bender
Maximum Bending Diameter	5/8" (#5) Rebar (16mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 5 seconds
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	90 lbs (40.8 kg)
Dimensions L x W x H	16.6" (425mm)x 12.5" (320mm)x 16.2" (415mm)



Model Number	DBD-20M Portable #6 Rebar Bender
Maximum Bending Diameter	3/4" (#6) Rebar (19mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 6 seconds
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	147 lbs (66.7 kg)
Dimensions L x W x H	16.5" (420mm)x 19" (482mm)x 16.5" (4205mm)



Model Number	DBD-25X Portable #7 Rebar Bender
Maximum Bending Diameter	7/8" (#7) Rebar (22mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 6 seconds
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	190 lbs (86 kg)
Dimensions L x W x H	19" (490mm)x 21.5" (550mm)x 17.2" (440mm)



Model Number	DBD-25H Portable #7 Rebar Bender
Maximum Bending Diameter	1" (#8) Rebar (25mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 9 seconds
Voltage / Amperage	115V 50/60Hz -15 amps
Tool Weight	210 lbs. (95 kg)
Dimensions L x W x H	21" (540mm)x 22.6" (580mm)x 17.2" (440mm)



Model Number	JMB-25H Table-Top #8 Rebar Bender
Maximum Bending Diameter	#8 (1") (25mm) Grade 60
Bending Angle / Speed	0 – 180 degrees / 8 Seconds
Voltage / Amperage	115V 50/60Hz -15 amps
Tool Weight	210 lbs. (95 kg)
Dimensions L x W x H	21" (540mm)x 22.6" (580mm) x 17.2" (440mm)



Model Number	DBD-32X Portable #9 Rebar Bender
Maximum Bending Diameter	1-1/8" (#9) Rebar (29mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 8 seconds
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	397 lbs (180 kg)
Dimensions L x W x H	23" (590mm)x 24.2" (620mm)x 18.7" (480mm)



Model Number	DBC-25H #8 Combination Bender/Cutter
Cut / Bend Speed	180 degree bend in 9 seconds
Rebar Capacity	Grade 60 Up to #8 (1")
Power Supply	115v, 50/60 Hz -12 amp Cutter, 15 amp
Total Weight	321 lbs. Total Weight, 49.6 lbs. Cutter, 210 lbs. Bender
Dimensions L x W x H	32.75" x 28" x 22.50"

This combination tool incorporates our popular DC-25X rebar cutter and our DBD-25H rebar bender together on a heavy-duty powder coated skidded housing.



Model No.	DBC-2520	DBC-2525
Max. Cutting	#6 or ¾" Grade 60	#8 or 1" Grade 60
Max. Bending	#7 or 7/8" Grade 60	#7 or 7/8" Grade 60
Cutter Power	115 Volt 50/60 Hz-10 amps	115 Volt 50/60 Hz-12 amps
Bender Power	115 Volt 50/60 Hz-12 amps	115 Volt 50/60 Hz-12 amps
Total Weight	482 lbs. (219 kg)	274 lbs. (124.5 kg)
Dimensions	19.25" (490mm) x 24.75" (629mm) x 37.25 (946mm)	

DBC-2520 (DBD-25X + DC20WH + Stand + Foot Pedal + Electrics)

DBC-2525 (DBD-25X + DC25X + Stand + Foot Pedal + Electrics)



Model No.	DBC-3225	DBC-3232
Max. Cutting	#8 or 1" Grade 60	#10 or 1-1/4" Grade 60
Max. Bending	#9 or 1-1/8" Grade 60	#9 or 1-1/8" Grade 60
Cutter Power	115 Volt 50/60 Hz-12 amps	115 Volt 50/60 Hz-18 amps
Bender Power	115 Volt 50/60 Hz-12 amps	115 Volt 50/60 Hz-12 amps
Total Weight	482 lbs. (219 kg)	511 lbs. (232 kg)
Dimensions	23" (590mm) x 27" (686mm) x 37.25 (946mm)	

DBC-3225 (DBD-32X + DC25X + Stand + Foot Pedal + Electrics)

DBC-3232 (DBD-32X + DC32WH + Stand + Foot Pedal + Electrics)



The Tiger Tier™ is the next generation in rebar tying tools. It is lightweight and has a compact, easy to hold, glove friendly grip. This tool features a one-piece CNC rigid nose piece. The long life battery will give you about 5000 ties on a single charge. Our standard wire is zinc-plated to inhibit rust and corrosion. The 18V Lithium-Ion power pack drives the tool's brushless motors. Each tool comes with two batteries, a charger and four spools of wire in a nifty molded carrying case ready to use. We offer a one-year warranty. This tool will save you time and money



BNT-40X Tiger Tier™ - Automatic Rebar Tier	
Maximum Tying Diameter	40mm (2 #6 Bars)
Battery (75 min quick charge)	DC18V (2 Supplied)
Weight	5.8lbs. (2.63kg)
Turns per tie	3 Wraps
Ties per Coil / Charge	Up to 128 / about 5,000
Wire Size	21 GA
Length of wire per tie	31" (780mm)
Dimensions (L) x (W) x (H)	11.69" x 4.29" x 11.81" (297mm x 109mm x 300mm)



BNT-25X Tiger Tier™ - Automatic Rebar Tier	
Maximum Tying Diameter	25mm (#3 x #4 Bars)
Battery (75 min quick charge)	DC18V (2 Supplied)
Weight	5.55 lbs. (2.5kg)
Turns per tie	3 Wraps
Ties per Coil / Charge	Up to 159 / 4,500
Wire Size	21 GA
Length of wire per tie	24.75" (629mm)
Dimensions (L) x (W) x (H)	11.06" x 4.29" x 11.81" (281mm x 109mm x 300mm)



BNT-58X Tiger Tier™ - Automatic Rebar Tier	
Maximum Tying Diameter	58mm (2 #8 Bars)
Battery (75 min quick charge)	DC18V (2 Supplied)
Weight	6.2 lbs. (2.9kg)
Turns per tie	4 Wraps
Ties per Coil / Charge	Up to 92 / 4,500
Wire Size	21 GA
Length of wire per tie	42.75" (1085mm)
Dimensions (L) x (W) x (H)	12.28" x 4.29" x 12.22" (312mm x 109mm x 310mm)



• BNT-40-Wire	Galvanized 21 gauge/triple tie wire in a 50 spool carton - shipping weight: 46 lbs.
• BNT-40-WIRE-USA	Black 21 gauge/triple tie wire in a 50 spool carton - weight 46 lbs. - MADE IN THE USA
• BNT-40-WIRE-P	Polyester coated galvanized 21 gauge/triple tie wire in a 50 spool carton - weight: 46 lbs.



• BNTLI-300	Replacement 18V Lithium-ion Battery
• BNTLI-196B	Replacement Charger
• BNH-40 Holster	Holster for the BNT-40 Rebar Tier
• BNEX-40X	Adjustable Arm Extension

The MBC-16B Manual Rebar Bender/Cutter

This tool has a long two-piece handle and a cam mechanism that provides the correct radius bend for rebars up to #5 (5/8"). It features an adjustable 2-1/2" (63.5mm) diameter bending roller and replaceable cutting jaws that incorporate two open slots with replaceable blades. The sturdy frame design is firmly mounted on a 2" x 8" x 44" wooden board and is ready to use. Other features include a comfortable long no-slip handle grip and a lifting chain and ring to make it easier to carry to and from the job site.




MBC-16B Manual Rebar Bender/Cutter	
Cutting and Bending Capacity	Up to #5 (5/8") (16 mm) rebar grade 60
Bending Capability	0 - 180° (in two bends)
Replacement Jaw Set	#MBC-16RJS - Weight: 7 lbs. (3.2 kg)
Shipping Weight	53 lbs. (24 kg) with wood board
Overall Dimensions	57" L x 7.5" W x 10" H (handle attached)
In Carton Dimensions	44.25"L x 8.50"W x 10.75"H


Rebar Adjustment Tools




BNHYBR-16
30" Steel Tube Handle




BNHYBR-21401
27.5" to 43.5" adjustable length with a Round End




BNHYBR-21402
27.5" to 43.5" adjustable length with a Wrecking End



BNHYBR-21404
27.5" to 43.5" adjustable length with a Chisel End



BNHYBR-20
43.5" long and weighs 8.4 lbs.

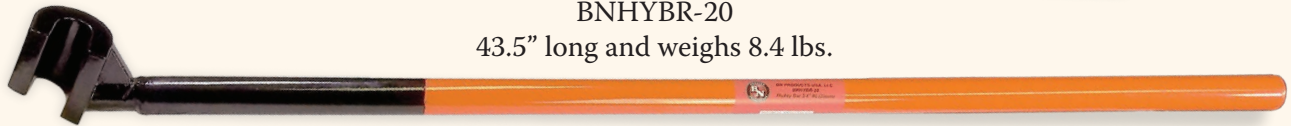

BNHYBR-29
63.25" long and weighs 16 lbs.



BNWB Wrecking/Pry Bar
57" long and weighs 13 lbs.



Hickey Bars and Wrecking Pry Bars

BNHYBR-16	Standard Hickey Bar for bending #3, #4 and #5 rebar
BNHYBR-21401	Hickey Bar for bending #3, #4 and #5 rebar - round end
BNHYBR-21402	Hickey Bar for bending #3, #4 and #5 rebar - wreck end
BNHYBR-21404	Hickey Bar for bending #3, #4 and #5 rebar - chisel end
BNHYBR-20	Hickey Bar for bending #6 rebar - 44" long
BNHYBR-29	Hickey Bar for bending #7 - #9 rebar - 64" long
BNWB	Heavy-Duty 57" Wrecking/Pry Bar




BNBCSF-18 & BNBCSF-24 FOLDING BOLT CUTTERS

Unique design allows the tool to fold for easy storage
 This tool uses a center-cut design in a popular 18" or 24" length. The slim head allows cutting close to surface material and the cutting jaws are industrial hardened forged alloy tool steel.

BNBCS High-Tensile Standard Bolt Cutters



Like most high tensile bolt cutters, these tools use a center-cut configuration available in six lengths from 14" to 42". The head is slim enough to allow cutting close to the surface. The cutting jaws are made from CrV hardened forged alloy steel.

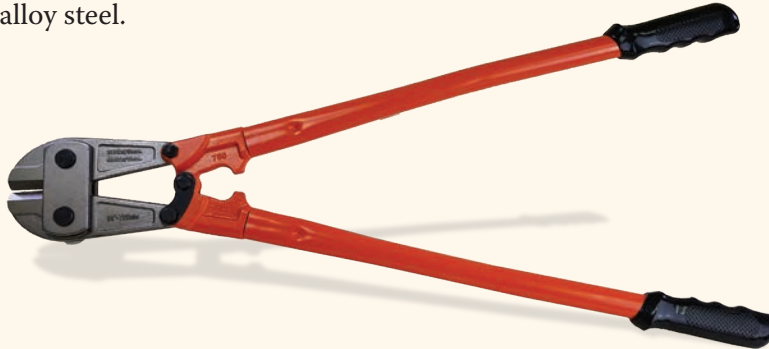

Item ID	Overall Length	Max Cap. HRC-48	Max Cap. HRC-19	Wt. (kg)	Replacement Jaws
BNBCS-14	14 5/8" (350mm)	3/16" (5mm)	5/16" (8mm)	2.35 lb. (1.07)	RB-BNBCS-14H
BNBCS-18	18 1/2" (450mm)	1/4" (7mm)	3/8" (10mm)	3.6 lb. (1.63)	RB-BNBCS-18H
BNBCS-24	24" (600mm)	5/16" (8mm)	7/16" (11mm)	5.65 lb. (2.56)	RB-BNBCS-24H
BNBCS-30	30" (750mm)	3/8" (10mm)	1/2" (13mm)	8.6 lb. (3.9)	RB-BNBCS-30H
BNBCS-36	36" (900mm)	7/16" (11mm)	9/16" (14mm)	11.05 lb. (5.01)	RB-BNBCS-36H
BNBCS-42	42" (1050mm)	1/2" (13mm)	5/8" (16mm)	17.25 lb. (7.82)	RB-BNBCS-42H

BNBC Triple-Edge Bolt Cutters

The BN Products **Triple-Edge Bolt Cutter** unlike our standard models have three durable cutting edges instead of just one that eventually wears out over a period of time. The blades on this new model bolt cutter are made of special hardened alloy tool steel for a long lasting and more durable life. Along with having three durable edges, it comes with handles and grips that are designed for better mechanical leverage and control. This one-of-a-kind tool comes in three different sizes, 24", 30", and 36".

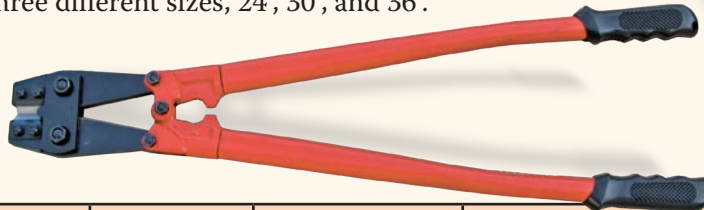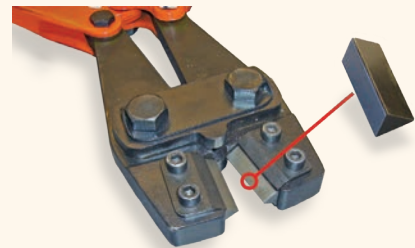

Model	Size	Net Weight	Max. Capacity	Max. Capacity	Max. Capacity
Number	Inch (mm)	(kg)	HRC15 (1)	HRC31 (2)	HRC42 (3)
BNBC-24	24" (600)	5.8 (2.6)	7/16" (11 mm)	3/8" (9.5 mm)	5/16" (8 mm)
BNBC-30	30" (750)	8.8 (4.0)	1/2" (13 mm)	7/16" (11mm)	3/8" (9.5 mm)
BNBC-36	36" (900)	13.5 (6.1)	9/16" (14 mm)	1/2" (13mm)	7/16"(11 mm)

1. Soft Metals include soft steel and non ferrous metals, bolts, screws, rivets, rod, chain and wire.
2. Medium Metals include iron and steel, bolts, screws, rivets, rod, chain, and wire.
3. Hard Metals include stainless wire, spring steel, heat treated rod, and grade 60 reinforcing rod

BNMC-32 Angled-Head Mesh Cutter

This multi-purpose 32" cutting tool has been designed for cutting mesh that is flat on the ground. The angled head helps to pick-up mesh and cut it out of the dirt. It has a fast and easy cutting action with a center-cut jaw design. The non-slip handles with finger grips are formed for high performance with minimize effort. The tool steel jaws are forged with a multi stage oil-hardened process for long life. The honed edge jaws have the capacity to cut up to 48 HRC hardness and they are replaceable. Handle shafts are powder-coated steel tubing



Concrete Form Tools

BNFTSP and BNFTSPN Stake Puller

Designed to easily remove 3/4 inch and 7/8-inch stakes. Harden rollers will grip the stake firmly. Handles provide excellent torque when using a twisting motion. Twisting the tool back at forth will loosen the stake and the handles make it easy to pull the stake out of the ground. Available with either a belt clip (BNFTSP) or a duplex nail puller (BNFTSPN).



BNFTSH Safety Stake Holder

Safely pound stakes without having to hold the stake. Spring loaded head that allows for secure gripping of both 3/4 inch and 7/8-inch round stakes. Tool can pick up stakes from the ground and will hold it away from the user's hand during the installation of the stake. Significantly reduces hand injuries.




BNFTSA Stake Stryker

Protects both the stake and the user from damage or injury. Provides full kinetic transfer of force from the hammer to the stake. The expanded head affords a larger striking surface reducing "Miss Hits". Protects the striking surface of the stake from breaking down. Keeps hands away from the stake during installation thus reducing job site injury.



BNFTNP Nail Puller

Easily remove duplex nails from stakes and forms. The handle and grip design provide exceptional leverage. The length of the handle reduces strain from bending and pulling. The curved head allows for nails to be pulled out straight so they can be reused.

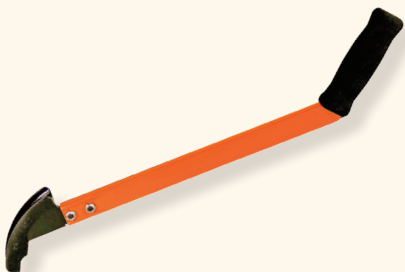

BN Drywall Sanders & Mixers

Tools designed for sanding walls and ceilings made of drywall or plaster in any position. They include a removable brush segment that allows sanding right up to the edge with ease. The BNR1841 and the BNR1837 includes our new **HALO lighting system** that helps make sure you can see all the variations on the surface you are sanding. The tool can be folded in half to reduce the length of the tool. The motor is mounted on the sanding head to reduce the number of moving parts and provides a direct drive to the sanding head. Center holes and edge vacuum locations provide a large area of dust collection. The tool also provides an easy hook-up with a standard vacuum hose to ensure a dust free working environment (when coupled with a properly used HEPA vacuum). With extension you can easily reach up to 12 ft. This tool is ETL certified.



BNR1841 Drywall Sander with Halo Light System

Voltage (power):	120V/60Hz (6A / 720W)
No Load Variable Speed:	1500-2700 rpm
Length x Width x Height:	12" x 9" x 10" (305mm x 229mm x 254mm)
Sanding Motion:	Rotation
SDR7 series Sanding Pads - dia.	7 in (180mm) Round
Abrasives - dia.	7 in (180mm)
Connection for dust Extraction - dia.	1.38" & 2.25" (35mm & 57mm)
Weight:	6.17 lbs. (2.8kg)
Accessories:	Vacuum hose, dust bag and Side Handle



BNR1837 Drywall Sander with Halo Light System

Voltage (Power):	120V/60Hz (5A / 600W)
No Load Speed:	600-1500 rpm
Length: base tool / with extension	43.3"/43.3"-65" (110cm/110cm-165cm)
Sanding Motion:	Rotation
Sanding Pads - dia.	9 in (225mm) SDR9 series sanding pads
Abrasives - dia.	8.86 in (225mm)
Connection for dust Extraction - dia.	1.38" & 1.85" (35mm & 47mm)
Weight: no extension/with extension	7.06lbs./7.7lbs. (3.2kg/3.5kg)
Accessories:	Vacuum hose



BNR1839 Drywall Sander with Triangle Head Adapter

Voltage (Power)	120V/60Hz (5A / 600W)
No Load Speed:	600-1500 rpm
Length: base tool / with extension	3.6ft. / 3.6ft.-5.4ft (110cm / 110cm-165cm)
Sanding Motion:	Rotation (Round Head) Oscillating (Triangle Head)
Sanding Pads - dia.	Round 9 in (225mm) SDR9 series sanding pads
	Triangle 8.5 in (215mm) SDT series sanding pads
Connection for dust Extraction - dia.	1.38" & 2.25" (35mm & 57mm)
Weight: no extension/with extension	7 lbs. / 7.7 lbs. (3.2kg / 3.5kg)
Accessories:	Vacuum hose

The BNR6169 Hand Held Paddle Mixer

Power	1050W / 9 amps / 1.4 Hp
Voltage	120V/60Hz
Number of Gears	1
No Load Speed	0-600 rpm
Drill Capacity	1/2" (13mm)
Motor Protective Type	Double Insulated
Mixing Paddle (ø Max.) BNR003-120	4-3/4" (120mm)
Shipping Weight	13.25 lbs (6 Kg)



The BNR6169 Hand Held Mixer has a variable speed trigger with a lock-on button for continuous operation. It comes with a standard M14 paddle connection or 1/2" drill chuck for any mixing paddles. The rear D-handle rotates 360° and the tool comes with a 3-position removable side handle. Includes BNR003-120 paddle and carrying case.

The BNR6400 Professional Mixer

Power	1800W / 15 Amps / 2.4Hp
Voltage	120V/60Hz
Number of Gears	2
No Load Speed I	150 - 300 rpm
No Load Speed II	300 - 700 rpm
Motor Protective Type	Double Insulated
Mixing Paddle (ø Max.) BNR001-160	6-1/2" (160mm)
Shipping Weight	21 lbs (8.5 Kg)



The BNR6400 Professional Mixer has ergonomically designed handles with a soft grip feature. The 2-speed power mixer motor incorporates a soft start feature with a variable speed control settings. Safety on/off switch also has a lock-on button for continuous operation. The metal sandwich handles will not break. Includes a BNR001-160 paddle, 1/2" drill chuck and M14 adapter

The BNR7000 TwinMaster Mixer

Power	1400W / 11.7 amps / 1.9 Hp
Voltage	120V/60Hz
Number of Gears	1
No Load Speed	270 - 460 rpm
Drill Capacity	1/2" (13mm)
Motor Protective Type	Double Insulated
Mixing Paddle (ø Max.) BNR007-140	5-1/2" (140mm)
Shipping Weight	16.5 lbs (7.5 Kg)



The BNR7000 TwinMaster Mixer has ergonomically designed handles with a soft grip feature. This unique mixer includes our BNR007-140 TwinMaster™ mixing paddle that actually spins in two directions at the same time virtually eliminating bucket spin.

The BNR6402K Double Paddle Mixer

Power	1800W / 15Amps / 2.4 Hp
Voltage	120V/60Hz
Number of Gears	2
No Load Speed I	180 - 460 rpm
No Load Speed II	300 - 700 rpm
Motor Protective Type	Double Insulated
Mixing Paddles (2) (ø Max.) BNR008-120K	4-3/4" (120mm)
Shipping Weight	23 lbs (10.4 Kg)



The BNR6402K Pro Double Mixer has ergonomically designed handles with a soft grip feature. The 2-speed power mixer motor incorporates a soft start feature with a variable speed control settings. The metal sandwich handles will not break. Safety on/off switch also has a lock-on button for continuous operation. Includes our BNR008-120K mixing paddles

Paddles for the BN Power Mixers



BNRA0315	1/2" Drill Chuck
BNR001 - Specify Diameter	120 mm (4.75") or 140 mm (5.50") or 160 mm (6.30") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, mortars, tile adhesives and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR002-57	Diameter: 57 mm (2.25") • Overall length: 13.5" • Designed for paints, lacquers, thin coatings, and ready-mix plaster. • Material Flow: Top to Bottom • Connection: 5/16" hex shank
BNR003- Specify Diameter	120 mm (4.75") or 140 mm (5.50") or 160 mm (6.30") • Overall length: 60 cm (24") • Designed for concrete, mortars, plasters, heat-insulating plasters, and epoxy resin with sand, best for heavy and high viscosity materials. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR004- Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for thinset, tile adhesive, grout, adhesive mortars, ready-mix mortars, and pointing mortars, and fillers, best for small volumes on high speed mixers. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR005-120	Diameter: 120 mm (4.75") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, tile adhesive and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads



BNR006-100	Diameter: 100 mm (3.875") • Overall length: 60 cm (24") • Designed for paints, lacquers, glazings, primers, and paste, best for small volumes of low viscosity materials • Recommended to use on BNR6169. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR007-140	Diameter: 140mm (5-1/2") • This is a special paddle that fits the BNR7000 TwinMaster Mixer™. It turns in two directions at the same time.
BNR008-120K Paddles sold in pairs left & right	Diameter: 120 mm (4.75") Overall length: 60 cm (24") • Designed for concrete, cement, mortars, and grouts with aggregate less than 3/8" diameter. Also for gypsum lime plaster, fibrated aluminum roof coatings and paints. Not for highly viscous materials. • Material Flow: Top to Bottom • Connection: 13 mm or 1/2" Hex Shank, for BNR6402K mixer.
BNR009-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for fillers, bitumen coatings, joint cement, epoxy-resin compounds, and grouting compounds, best for prevention of lump formation and lessens adding air into the mixture. Mixture flow is parallel. • Connection: M14 x 2 male threads
BNR010-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for gypsum-lime plaster, fibrated aluminum roof coatings, and paints. This paddle can be disassembled in two pieces and fit into a carrying case. • Material Flow: Top to Bottom • Connection: M14 x 2 male thread

BNMS-6400 Professional Mixing Station


This is the ultimate mixing station for self-levelling materials, compounds, and epoxies, producing the perfect mix every time.

Our BNMS-6400 provides efficient hands-free mixing; enabling fast precision pouring of materials. It mixes up to 220 lbs. (22 gal bucket) in minutes. The mixing bucket comes complete with a removable dust splash cover to keep your job clean. The Station is lightweight with “easy tilt” for control and balance. It is also equipped with a built-in timer (for those jobs that require a timed mix) and ergonomic handles for precision pouring. The heavy duty casters (including two that locks) are built for portability and movement while pouring. The BNMS-6400 station has Two gear settings for 150 to 700 RPM’s variable speed mixer. This is a heavy duty 1800W tool built for the really tough jobs. The mixer has a Soft-Start with lock-on feature and is double insulated, with 12’ power cord. Comes complete with a BNR001-160 M14 mixing paddle (6-1/2” 160mm diameter). Can be ordered as BNMS-100 without the mixer.



Concrete Anchors

Drop-in Anchors (CT and GT Type) are internally threaded controlled expansion fasteners with an expander plug. They are suitable for flush or semi-flush mounting applications in cured concrete. The anchor is set by driving the expansion plug towards the bottom of the anchor using a setting tool.



CT Type Anchor




GT Type Anchor

Product Code	Screw Threads		Body Size	Tension Load	
	OD	LEN		(lbs.)	(lbs.)
Specs.	OD	LEN	OD x L	(lbs.)	(lbs.)
CT-3040U	3/8"	5/8"	1/2" x 1- 9/16"	2,205	3,307
CT-4050U	1/2"	13/16"	5/8" x 2"	4,189	5,512
GT-3030U	3/8"	1/2"	1/2 x 1-3/16"	2,094	2,866



C-Type Anchor

The C-Type Drive Anchor features a hardened center pin that is driven through the center to expand the anchor. It includes a nut and washer that can be set to various depths. The anchor is set when the center pin is flush with the top of the bolt making it easy to inspect.



HT - Setting Tool

Product Code	Screw Threads		Body Size	Tension Load (lbs.)		Shear Load (lbs.)
	OD	LENGTH		OD x L	Initial	
Specs	OD	LENGTH	OD x L	Initial	Ultimate	-
C-4070U	1/2"	1"	1/2" x 2-3/4"	3,175	4,255	5,556
C-4090U	1/2"	1-3/16"	1/2" x 3-9/16"	3,175	4,255	5,556

BN Portable Job-Site Generators

Our 4-cycle generators are compact, high performance power-houses. All of our models are air-cooled, gasoline driven units that are designed to supply electrical power to operate electrical loads on job sites, or in remote locations where utility power is unavailable or in place of a electric utilities due to a power outage. The emission control system for these generators are warranted for standards set by the Environmental Protection Agency and also the California Air Resources Board (CARB). The output receptacles include 12V, 8.3A DC, 120V 20A GFCI and, 120/240V AC 30A Twist Lock. Each unit comes complete with stand legs, solid rubber wheels and a pull handle for convenient mobility. All models are equipped with a key-start, low oil shut-off switch, a circuit breaker, and a fuel level gauge.



BNG3000



BNG5000



BNG6500



BNG7500



BNG7500-D4



BNG9000

Available in Six Models

BNG3000	3000W rated power - key electric start - CARB certified - with GFCI plugs
BNG5000	5000W rated power - key electric start - CARB certified - with GFCI plugs
BNG6500	6500W rated power - key electric start - CARB certified - with GFCI plugs
BNG7500	7500W rated power - key electric start - CARB certified - with GFCI plugs
BNG7500-D4	7500W rated power - key electric start - CARB certified - with GFCI plugs
BNG9000	9000W rated power - key electric start - CARB certified - with GFCI plugs

New BN Portable Inverter/Generators

Clean and stable power for cell phones and electronics, we now offer two new inverter/generators. Both are lightweight, versatile and quiet. They have smart speed regulation to save fuel and are EPA and CARB certified. Features include a low oil indicator light with automatic shut-off, overload and fault indicators, rain port covers and standard USB, duplex, 12V DC power plugs and has parallel capability and cables.



BNG2000i	1800W rated power - pull start - CARB certified - with GFCI plugs
BNG3300i	3000W rated power - key electric start - CARB certified - with GFCI plugs



ABOUT US ~ BN PRODUCTS-USA, LLC.

A Division of Benner-Nawman. Inc.

Gus Benner and Rollie Nawman formed a partnership and founded the Benner-Nawman in 1925 as a sheet metal fabricator in Oakland, California. Benner-Nawman became a corporation in 1946. In 1948, the Pacific Bell Telephone and Telegraph Company of San Francisco, California asked Benner-Nawman to design and fabricate a phone booth made from aluminum, glass and steel. From 1950 to 1999, the company's primary business was the fabrication and assembly of public telephone booths and accessories, selling hundreds of thousands of units in the United States and into over 40 countries worldwide.

In 1976, Benner-Nawman created a separate distribution group for selling low-voltage termination cabinets, enclosures and hand tools to the electrical market plus power tools and related equipment to the construction market.

In 2010, the Benner-Nawman created a subsidiary company BN Products-USA, LLC. Benner-Nawman, Inc. (on the Web: www.benner-nawman.com) retained all products related to the electrical wholesale market while the new company, BN Products – USA, LLC. (on the Web: www.bnproducts.com) handles all sales on products related to the construction wholesale market.

Today, both companies enjoy partnerships with several domestic and global organizations helping them in the supply and development of products for the world market.

Currently, BN Products-USA, LLC. uses a network of construction product manufacturer representative companies plus our corporate team to promote our products across the United States, Canada, Central America and the Caribbean. Each representative company is located in the region they represent. Some of our professional manufacturer representatives also stock our products at their regional warehouse for faster delivery. Our corporate offices and warehouse facilities are located in a 56,000 square foot location on seven acres of land in the Industrial Air Park of Wickenburg, Arizona. There is ample room within the facility for maintaining product inventory plus there are several acres of land for further development. National trucking companies, FEDEX, DHL and UPS deliver and accept our shipments on a daily basis

3450 Sabin Brown Road • Wickenburg, Arizona 85390
(800) 992-3833 • mail@bnproducts.com
www.bnproducts.com