



REBAR TOOLS
Benner-Nawman, Inc.
3450 Sabin Brown Road • Wickenburg, Arizona 85390 • (800) 992-3833
• Rebar Cutters • Rebar Benders • Rebar Tiers • www.bnrebartools.com • Since 1925 •

**Shear Performance
Bent on Perfection**

The Catalog - Rebar Tools • 2008

Table of Contents

THE REBAR TYING TOOL

BNT-64 Rebar Tying Tool 3

PORTABLE REBAR CUTTERS

DCC-1618 Cordless #5 Rebar Cutter 4
 DC-16LZ Portable #5 Rebar Cutter 4
 DC-16W Portable #5 Rebar Cutter 5
 DC-20WH Portable #6 Rebar Cutter 5
 DC-25X Portable #8 Rebar Cutter 6
 DC-32WH Portable #10 Rebar Cutter 6

PORTABLE REBAR BENDERS

HB-16W Portable #5 Rebar Bender 7
 DBR-25WH Portable #8 Rebar Bender 7
 DBD-16X Portable #5 Rebar Bender 8
 DBD-20X Portable #6 Rebar Bender 8
 DBD-25X Portable #7 Rebar Bender 9
 DBD-25H Portable #8 Rebar Bender 9
 DBD-32X Portable #9 Rebar Bender 10

COMBINATION UNITS

DBC-16H Combination Rebar Bender/Cutter 10
 DBC-20X Combination Rebar Bender/Cutter 11
 DBC-25H Combination Rebar Bender/Cutter 11
 DBC-25X Combination Rebar Bender/Cutter 12
 DBC-2520 & DBC-2525
 Combination Rebar Bender/Cutter 12
 DBC-3225 & DBC-3232
 Combination Rebar Bender/Cutter 13

WORKSTATIONS

CWS-2025 Cutter Workstation Table 13
 BWS-25X & BWS-32X Bender Workstation Table 14

TUNE-UP KITS FOR REBAR CUTTERS

MANUFACTURER REPRESENTATIVES 15



New Products For This Catalog Issue!



The BNT-64 Rebar Tier reduces tying time and is great for repetitious tying work. You can find out more about this unique tool on page 3.

The DBD-25H heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #8 (1") grade 60 at the job site or in your shop. This is real work horse. For more information on this product please go to page 9.

This DBC-16H portable combination rebar bender/cutter provides jobsite cutting and bending of 5/8" rebar all in one tool. The unique design provides the operator the ability to cut and bend rebar for in-place rebar or stationary fabrication applications. Voted one of the most innovative products at the World of Concrete this year. More information is on page 10.

The DBC-25H is a combination rebar bender/cutter package. The rebar cutter can be removed and used in a portable application or secured in the stationary position with U-Bolts and operated hands-free by the convenient foot pedal switch. Get more information on page 11.

BNT-64 Rebar Tying Tool

The BNT-64 Rebar Tier reduces tying time and is great for repetitive tying work. It also reduces the risk of carpal tunnel and back injuries. The one-hand operation allows other hand to hold rebar in place. It securely ties up to #10 (32mm) x #10 (32mm) rebars. The tool uses strong double tie wrap of 18 gauge (.081") galvanized wire. It makes consistent ties with no wire waste in only 1.6 seconds a tie. Each wire spool ties 120-200 rebars, depending on the rebar sizes. Wire spools are quickly & easily changed. The patented design allows you to easily change the handle from a vertical work position to a horizontal work position (as pictured). The tool is shipped standard with the # 32 wire guide for tying two number six bars together. We also carry optional wire guides for three other rebar combinations including our #64 for tying number ten bars together. The tying tool comes complete with ten spools of tying wire, two batteries with a quick charger unit all in an impact resistant case. Our rebar tier only has 75 parts and additional rolls of tying wire are both economical and ready for quick ship by UPS. The BNT-64 in operation only weighs 8.4 pounds.



Maximum Rebar Tying Capacity	#10 (32mm) x #10 (32mm) with the #64 wire guide installed
Tool Weight	8.4 lbs (3.8 kg) w/ battery and wire spool
Shipping Weight	27 lbs (12.25 kg) complete package
Tool Dimensions L x W x H (mm)	25.74" (660mm) x 3.12" (80mm) x 7.02" (180mm) for horizontal work
	22.62" (508mm) x 3.12" (80mm) x 11.31" (290mm) for vertical work
Number of Parts	Only 75
Tying Speed	1.6 seconds per tie
Tie Wraps/Wire Size	(2) tie wraps of 18 gauge or 1.0 mm
Wire Spool Length/ Wire Types	(148 ft) 45 m per spool / Galvanized Wire or plastic coated
Ties Per Coil	120 to 200 (example: #5 x #5 = 140 ties per spool)
Wire Carton/ Shipping Weight	40 wire spools per carton / 29 lbs. (13 kg)
Ties Per Battery Charge	750 ties per battery charge (4-5 wire spools)
Torque Adjustment	0-9 (increases wire tie tightness)
Standard Wire Guide Installed	#32 wire guide ties maximum #6 x #6 rebars
<i>Optional Wire Guides: Using the right size wire guide decreases wire usage and clearance.</i>	
• Optional Wire Guide	#26 wire guide ties maximum #3 x #4 rebars • #51 wire guide ties maximum #8 x #8 rebars • #64 wire guide ties maximum #10 x #10 rebars
Battery Type (#BN-12VCad)	Rechargeable Ni-Cd (nickel-cadmium)
Battery Voltage/ Recharging Time	DC 12 Volt / Approx. 30 minutes
Battery Charger (#BN-12VChgr)	110-240 VAC, 50/60Hz
Operating Humidity	90% or under
Operating Temperature	0 to 50 degrees C (32 to 122 degrees F)

DCC-1618 Cordless #5 Rebar Cutter

The DCC-1618 cordless rebar cutter will safely and cleanly cut rebar up to 5/8" diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts, and rod. The DCC-1618 can be used in rescue operations, cut in close proximity to a trapped victim, does not throw sparks or heat. The cutting head quickly rotates up to 345 degrees for using in vertical, horizontal, or difficult applications. A safety relief valve for retracting the piston and a cutting guard are standard features. This tool ships complete with (2) each 18 volt DC batteries, 30 minute fast battery charger, removable side handle, plastic carrying case, and a tool kit.



Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cuts per battery /Cutting speed	75 cuts on full charge / 5 seconds
NiMH Battery (EB1830H) Charger (UC24YJ)	18 Volt DC, 3.0 Ah 115 Volt 60 Hz Charger
Tool Weight	16.1 lbs.(7.3 kg) with battery
Dimensions (w/o side handle) L x W x H	17.9"(460mm) x 3.8"(98mm) x 9.4"(240mm)



DC-16LZ Portable #5 Rebar Cutter

The DC-16LZ is a medium-duty rebar cutter that will safely, efficiently, and cleanly cut rebar up to #5 (5/8") diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts and rod but is specifically designed for rebar. The DC-16LZ is intended for effortless medium-duty applications on vertical and horizontal rebar cutting applications. This tool would be a great asset for swimming pool, masonry, and ICF contractors. The DC-16LZ is a cold-cutting shear, unlike saws with abrasive blades and cutting torches, there are no sparks or flame. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with hydraulic oil and a tool kit.




Double Insulated

Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting Speed / Pressure	2 Seconds / 13 Tons
Voltage/Amperage	115V 50/60Hz / 9 Amps
Tool Weight	15 lbs. (6.8 kg)
Dimensions L x W x H	14.8" (380mm) x 6.8" (175mm) x 4.1" (105mm)

DC-16W Portable #5 Rebar Cutter

The DC-16W portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #5 (5/8") diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts and rod but is specifically designed for rebar. The DC-16W cutter is designed for effortless vertical and horizontal cutting applications. The DC-16W is a cold-cutting shear unlike saws with abrasive blades and cutting torches. There are no sparks or flame and no trailing hoses to snare equipment or worker's feet. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with a removable side handle, hydraulic oil and a tool kit.

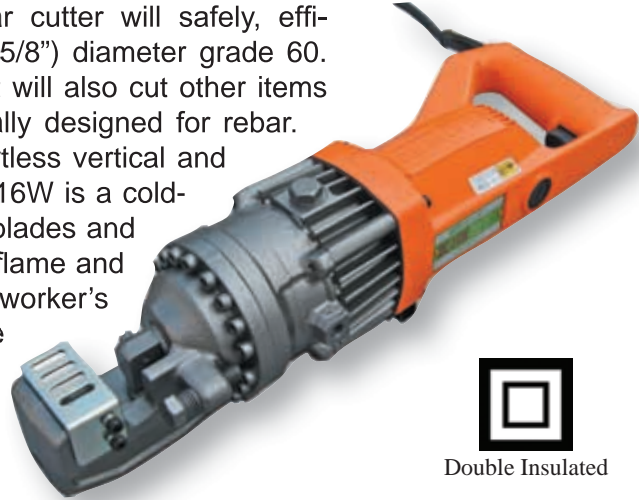

Double Insulated

Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting speed / Pressure	2.5 Seconds / 15 Tons
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	17.6 lbs (8 kg)
Dimensions L x W x H (w/side handle)	18" (460mm) x 10.5" (270mm) x 4.5" (115mm)



DC-20WH Portable #6 Rebar Cutter

The DC-20WH portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #6 (3/4") diameter grade 60. DIAMOND originated this concept in 1972; continuous development has led to higher output, lower weight, and even greater toughness and durability. The DC-20WH is a cold-cutting shear unlike saws with abrasive blades and cutting torches. There are no sparks or flame and no trailing hoses to snare equipment or worker's feet. Ideal for cutting epoxy-coated rebar. Fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with hydraulic oil and a tool kit.



Maximum Cutting Diameter	3/4" #6 Rebar (19mm) Grade 60
Cutting Speed / Pressure	3 Seconds / 15 Tons
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	25.4 lbs (11.5 kg)
Dimensions L x W x H	16" (410mm) x 4.3" (110mm) x 8.2" (210mm)

DC-25X Portable #8 Rebar Cutter

The DC-25X portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #8 (1") diameter grade 60. The DC-25X cutter is ideal for a small fabrication shop, especially if used with our CWS-2025 Work-Station. Because our rebar cutters feature a locking trigger switch, the cutter can be operated with a foot pedal switch and our GFI protected electrical outlet. There are no sparks or flame so it also works great on epoxy-coated rebar. It's the fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a steel carrying case with hydraulic oil and a tool kit.




Maximum Cutting Diameter	1" #8 Rebar (25mm) Grade 60
Cutting Speed / Pressure	5 Seconds / 30 Tons
Voltage/ Amperage	115V 50/60Hz / 12 amps
Tool Weight	49.6 lbs (22.5 kg)
Dimensions L x W x H	20" (515mm) x 5.9" (150mm) x 9.8" (250mm)



DC-32WH Portable #10 Rebar Cutter

The DC-32WH portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #10 (1¼") diameter grade 60. The DC-32WH cutter is ideal for bridge and highway work, and in small rebar fabrication shops. This unit is available in combination with a DBD-32X bender on a stand, in a WorkStation table and on a trailer. There are no sparks or flame so it also works great on epoxy-coated rebar. It's the fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a wooden carrying case with hydraulic oil and a tool kit.

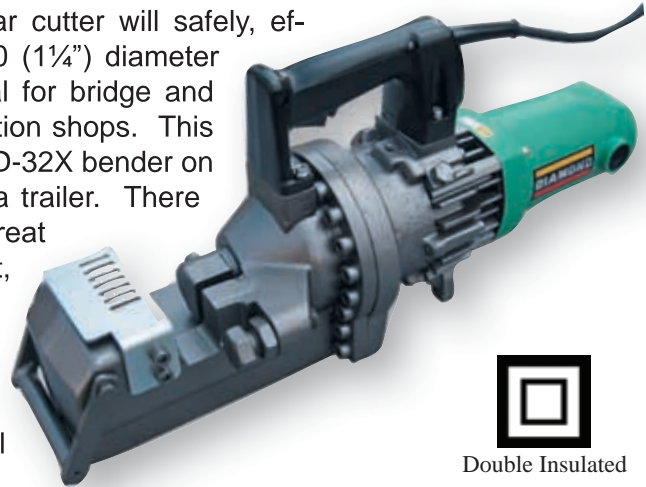

Double Insulated

Maximum Cutting Diameter	1-1/4" #10 Rebar (32mm) - Grade 60
Cutting Speed / Pressure	7 Seconds / 45 Tons
Voltage/ Amperage	115V 50/60Hz / 18 amps
Tool Weight	79 lbs (35.8 kg)
Dimensions L x W x H	23.1" (591mm) x 7" (180mm) x 10.6" (272mm)

HB-16W Portable #5 Rebar Bender



90 degree shoe and collar set

The HB-16W portable heavy-duty electric/hydraulic rebar bender helps save valuable man-hours by bending rebar up to 5/8" (#5) grade 60 from 0-135 degrees in-place at the job site. Other features include a double insulated electric motor and a removable bending guide for repeating the same angle bend. A standard 90 degree bending shoe and collar set make it simple to repeat 90 degree bends without a guide. The removable bending collar increases the bending radius and minimizes rebar breakage, especially on #5 grade 60. This portable electric/hydraulic rebar bender ships complete in a steel carrying case with hydraulic oil and a tool kit. Solves bending applications other tools can't even attempt.

Maximum Bending Diameter	5/8" #5 Rebar (16mm) - Grade 60
Bending Angle / Speed	0 - 135 degrees / 8 Seconds
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	33 lbs (15 kg)
Dimensions L x W x H	22.8" (584mm) x 7.6" (195mm) x 8" (205mm)



DBR-25WH Portable #8 Rebar Bender



Small & large bending die set

The DBR-25WH is a portable heavy-duty electric/hydraulic rebar bender and straightener. It helps save valuable man-hours by cleanly and efficiently bending or straightening bent rebar. It functions as a simple 90-degree portable electric rebar bender. The interchangeable bending hook covers rebar diameters from #4 to #8 grade 60. Maximum pressure for bending and straightening ranges from 8.5 to 11 tons. It's portable and versatile enough to bend or straighten rebar in-place with its push/pull hydraulic capabilities. It will bend a 90-degree angle in only (4) seconds. The bending head also rotates 360 degrees. Ships complete in a wooden carrying case with hydraulic oil, a tool kit and two additional bending dies. This tool solves bending applications other tools can't even attempt.

Maximum Bending Diameter	1" #8 Rebar (25mm) Grade 60
Bending Angle	Up to 94 degrees (1/2") - up to 90 degrees (1")
Voltage/ Amperage	115V 50/60Hz / 12 amps
Tool Weight	62.3 lbs (28 kg)
Dimensions L x W x H	25.75" (660mm) x 10.5" (270mm) x 7.8" (200mm)

DBD-16X Portable #5 Rebar Bender

The DBD-16X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #5 (5/8") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The dial-type angle selector can be set to accurately bend any angle from 0-180 degrees. Bends (3) each #3 rebar or (2) each #4 rebar or (1) each #5 rebar at one time. An emergency stop switch and two side lifting handles are standard features. Ships complete with set of (6) bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	5/8" (#5) Rebar (16mm) Grade 60
Bending Angle/speed	Up to 180 degrees / 5 seconds
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	90 lbs (40.8 kg)
Dimensions L x W x H	16.6" (425mm) x 12.5" (320mm) x 16.2" (415mm)



DBD-20X Portable #6 Rebar Bender



The DBD-20X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #6 (3/4") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The dial-type angle selector can be set to accurately bend any angle from 0-180 degrees. An emergency stop switch and two side lifting handles are standard features. The DBD-20X portable rebar bender comes complete with set of (6) bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending.

Maximum Bending Diameter	3/4" (#6) Rebar (19mm) Grade 60
Bending Angle/speed	Up to 180 degrees / 7 seconds
Voltage/ Amperage	115V 50/60Hz / 15 amps
Tool Weight	134.5 lbs (61 kg)
Dimensions L x W x H	16.4" (420mm) x 18" (462mm) x 16.2" (415mm)

DBD-25X Portable #7 Rebar Bender

The DBD-25X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #7 (7/8") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The lever-type angle selector can be set to accurately bend any angle from 0-180 degrees. An emergency stop switch and two lifting handles are standard features. The DBD-25X portable rebar bender comes complete with a set of (6) bending rollers in a steel carrying case, a tool kit, a bender cover, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	7/8" (#7) Rebar (22mm) Grade 60
Bending Angle/speed	Up to 180 degrees / 6 seconds
Voltage/ Amperage	115V 50/60Hz / 12 amps
Tool Weight	190 lbs (86 kg)
Dimensions L x W x H	19" (490mm) x 21.5" (550mm) x 17.2" (440mm)



DBD-25H Portable #8 Rebar Bender

This heavy-duty portable bender helps to save valuable man-hours by effortlessly bending rebar up to #8 (1") Grade 60 at job sites or in your shop. This electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The lever-type angle selector can be set to accurately bend any angle from 0-180 degrees. The roller chart makes it easy to select the correct combination of rollers to achieve an inside bending diameter of six times the rebar diameter meeting ACI 318-05 specification. An emergency stop switch and two lifting handles are standard features. The DBD-25H portable rebar bender comes complete with (9) bending rollers in two steel carrying cases, a tool kit, a bender cover, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	1" (#8) Rebar (25mm) Grade 60
Bending Angle/Speed	Up to 180 degrees / 9 seconds
Voltage/Amperage	115V 50/60Hz -15 amps
Tool Weight (kg)	210 lbs. (95 kg)
Dimensions L x W x H	21" (540mm) x 22.6" (580mm) x 17.2" (440mm)

DBD-32X Portable #9 Rebar Bender



The DBD-32X is a heavy-duty portable table-type bender. This unit is the largest 115 volt portable rebar bender available. This powerful electrically driven mechanical unit will easily bend 1-1/8" Grade 60 rebar 180 degrees in only 8 seconds. This fast and accurate bender is a valuable tool for small to medium size production shops. It comes standard with a hands-free foot pedal control switch and a complete bending radius roller set. This unit is available separately or in combination with a cutter mounted on a skid, stand or trailer unit. An optional stand is also available.

Maximum Bending Diameter	1-1/8" (#9) Rebar (29mm) Grade 60
Bending Angle/speed	Up to 180 degrees / 8 seconds
Voltage/ Amperage	115V 50/60Hz / 12 amps
Tool Weight	397 lbs (180 kg)
Dimensions L x W x H	23" (590mm) x 24.2" (620mm) x 18.7" (480mm)



DBC-16H #5 Rebar Cutter/Bender



This DBC-16H portable combination rebar cutter and bender provides jobsite cutting and bending of rebar all in one tool. The unique design provides the operator the ability to cut and bend rebar for in-place rebar or stationary fabrication applications. Now you have the ability to cut and bend rebar protruding from a wall or column or just fabricate what you need on a table. Our powerful electric/hydraulic design is for heavy-duty #5 (16 mm) grade 60 rebar. It's fast and easy to use, there is no changing of attachments, bends rebar up to 180 degrees. A steel carrying case, tool kit, hydraulic oil and operations manual are included, All of our tools carry a one-year parts and labor warranty.

Cut / Bend Speed	3 seconds 180 degree bend in 7 seconds
Center Roller	2.42" (62 mm) Diameter (R 31)
Clearance (In-place) Cutting	1-3/4" (44.5 mm) from Surface
Clearance (In-place) Bending	4.5" (115 mm) from Surface
Rebar Capacity	Up to #5 (16mm) Grade 60
Power Supply	Electric motor 115v, 50/60 Hz -10 amps
Total Weight (kg)	40 lbs. (18.2)/Tool Weight , 62lbs. (28.2) Shipping Weight
Tool Dimensions	25-1/8" L x 6-3/8" W x 8-5/8" H including lifting handles (cutter up)

DBC-20X Combination #6 Rebar Bender/Cutter

The DBC-20X combination bender and cutter is rated for 3/4" grade 60 rebar. This ultimate combination unit combines the very popular DC-20WH rebar cutter and the DBD-20X rebar bender together on a heavy-duty powder-coated skidded housing. The bender and cutter are simply plugged into the weather-protective electrical outlets, no hard wiring. The DC-20WH cutter can be removed and used in a portable application or secured in the stationary position with U-bolts and operated hands-free by a standard foot pedal switch. A toggle switch allows you to go from bending to cutting, the GFI plug is a standard safety feature. This unit is shipped fully assembled and includes a steel case with six bending rollers and a foot pedal control switch.



Models #s	DC-20WH Rebar Cutter		DBD-20X Rebar Bender	
Cut/Bend Speed	3 seconds		180 degree bend in 7 seconds	
Rebar Capacity	Grade 60	Up to #6 (3/4")	Grade 60	Up to #6 (3/4")
Power Supply	Electric motor 115V, 50/60 Hz -10 amp Cutter, 15 amp Bender			
Weight	212 lbs. Total Weight (96 kg), 25.4 lbs. Cutter, 134.5 lbs. Bender			
Dimensions	28" (711mm) L x 18" (457mm) W x 21.5" (546mm) H with lifting handles			



DBC-25H #8 Combination Rebar Bender/Cutter

The DC-25X rebar cutter can be removed and used in a portable application or secured in the stationary position with U-Bolts and operated hands-free by the convenient foot pedal switch. This is a combination of the very popular DC-25X rebar cutter and our new DBD-25H rebar bender together on a heavy-duty powder-coated skidded housing. The bender meets all ACI 318-05 specifications. A toggle switch allows you to go from bending to cutting and both are operated hands-free with a foot pedal. The GFI plug is a standard safety feature. This combination unit is easy to maintain and is backed with a one-year parts and labor warranty. The unit is shipped fully assembled and includes two steel cases with (9) bending rollers and a #1BR5130 foot pedal control switch.



Models #s	DC-25X Rebar Cutter	DBD-25H Rebar Bender
Cut/Bend Speed	5 seconds	180 degree bend in 9 seconds
Rebar Capacity	Grade 60 Up to #8 (1")	Grade 60 Up to #8 (1")
Power Supply	Electric motor 115v, 50/60 Hz -12 amp Cutter, 15 amp Bender	
Total Weight	321 lbs. Total Weight, 49.6 lbs. Cutter, 210 lbs. Bender	
Dimensions	32.75" L x 28" W x 22.50" H including lifting handles	



DBC-25X Combination Rebar Cutter/Bender

The DBC-25X combination rebar bender and cutter was designed for the contractor who wants an all-in-one unit. Here are two super tools in one great package; essentially this unit is a DBD-25X bender with a built-in DC-25X cutter. The rebar bender is rated for #7 grade 60 and the rebar cutter is rated for 1" grade 60. A toggle switch allows you to go from bending to cutting. The DBC-25X portable rebar bender comes complete with a set of (6) bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending. The picture above is shown with the optional bender stand part #1BR51312.



DBC-25X				
DBC-25X	DC-25X Rebar Cutter		DBD-25X Rebar Bender	
Cut/Bend Speed	5 seconds		180 degree bend in 6 seconds	
Rebar Capacity	Grade 60	Up to #8 (1")	Grade 60	Up to #7 (7/8")
Power Supply	Electric motor 115V, 50/60 Hz -12 amp: Cutter, 12 amp: Bender			
Weight	260 lbs. Total Weight (118 kg)			
Dimensions	27.5" (699mm) L x 26.75 (680mm) W x 17.2 (437mm)" H with lifting handles			



DBC-2520 & DBC-2525 Combination Rebar Bender/Cutter

These are essential combination rebar bender and cutter units. They simply combine the very popular DBD-25X bender with the DC-20WH or DC-25X rebar cutter both together on a stationary stand. The main advantage to owning this versatile combination unit is that the rebar cutter can be simply removed and used in any portable application or locked into a stationary position and then operated by a standard foot pedal switch. The other advantage is production; the bender table is at the ideal working height and the DBD-25X bends rebar from 0 -180 degrees. The BCSE-25X combination stand joins the bender & cutter both together.



Models #s	DBC-2520	DBC-2525
Max. Cutting	#6 or 3/4" Grade 60	#8 or 1" Grade 60
Max. Bending	#7 or 7/8" Grade 60	#7 or 7/8" Grade 60
Cutter Power	115 Volt 50/60 Hz -10 amps	115 Volt 50/60 Hz -12 amps
Bender Power	115 Volt 50/60 Hz -12 amps	115 Volt 50/60 Hz -12 amps
Total Weight	250 lbs. (113.5 kg)	274 lbs. (124.5 kg)
Dimensions	19.25" (490mm) L x 24.75" (629mm) W x 37.25 (946mm) H	

DBC-3225 & DBC-3232 Combination Rebar Bender/Cutter



These are essential combination rebar bender and cutter units. They simply combine the very popular DBD-32X bender with the DC-25X or DC-32WH rebar cutter both together on a stationary stand. The main advantage to owning this versatile combination unit is that the rebar cutter can be easily removed and used in any portable application or locked into a stationary position and then operated by a standard foot pedal switch. The other advantage is production; the bender table is at the ideal working height and the DBD-32X bends rebar from 0 -180 degrees. The BCSE-32X combination stand joins the bender & cutter both together.

Models #s	DBC-3225	DBC-3232
Max. Cutting	#8 or 1" Grade 60	#10 or 1-1/4" Grade 60
Max. Bending	#9 or 1-1/8" Grade 60	#9 or 1-1/8" Grade 60
Cutter Power	115 Volt 50/60 Hz -12 amps	115 Volt 50/60 Hz -18 amps
Bender Power	115 Volt 50/60 Hz -12 amps	115 Volt 50/60 Hz -12 amps
Total Weight	482 lbs. (219 kg)	511 lbs. (232 kg)
Dimensions	23" (590mm) L x 27" (686mm) W x 37.25 (946mm) H	



CWS-2025 Cutter Workstation Table

The CWS-2025 Workstation is the perfect height for increasing your rebar cutting production. It's designed to securely hold the DIAMOND model DC-20WH or DC-25X rebar cutter. Now you can operate your portable rebar cutter hands free with just a foot switch. The DC-20WH or DC-25X rebar cutter can be removed for use in portable applications. This Workstation includes an electrical outlet for plugging in the rebar cutter, a GFI plug and a foot pedal switch. This is a sturdy design with a 12-gauge heavy-duty galvanized sheet metal worktop. Modular design allows for other Workstations to be bolted together. Shipped partially assembled complete with hardware and instructions.



DC-20WH or DC-25X rebar cutters and foot operated switch are sold separately.

Model Number	CWS-2025
Rebar Cutter Mounting:	Two Heavy-duty U-bolts and Hardware Included
Power Box Supplied:	Electrical Outlet 115V -15 amp Duplex
Assembled Weight	125 lbs. (57 kg) Some assembly required
Overall Dimensions	48" L x 38" W x 35" H (1220mm x 965mm x 889mm)

BWS-25X & BWS-32X Bender Workstation Table

The BWS-25X and BWS-32X Workstations are the perfect height for increasing your rebar bending production. They're designed to fit around the DIAMOND model DBD-25X, DBD25H or DBD-32X rebar bender on a stand. The DBD-25X or DBD-32X rebar bender can be easily removed for use in any portable application, it simply slides in and out. This is a sturdy design with a 12-gauge heavy-duty galvanized sheet metal worktop. Modular design allows for other Workstations to be bolted together. Shipped partially assembled complete with hardware and instructions.



DBD-25X, DBD-25H and DBD-32X rebar benders, stands & foot operated switches are sold separately

Model Numbers	BWS-25X	BWS-25H	BWS-32X
Designed to fit Bender:	Model #DBD-25X	Model #DBD-25H	Model #DBD-32X
Bender Option Required:	#1BR51311 Stand	#BCS-25H Stand	#BCS-32X Stand
Assembled Weight	210 lbs. (95 kg)	225 lbs. (102 kg)	225 lbs. (102 kg)
Overall Dimensions	77" L x 38" W x 35" H (1956mm x 965mm x 889mm)	79" L x 38" W x 35" H (2007mm x 965mm x 889mm)	79" L x 38" W x 35" H (2007mm x 965mm x 889mm)



Don't Just Replace Your Cutting Blocks... Maintain Your Tool With a Tune-up Kit.



Tune-Up Kits are available for all of our rebar cutter models, these kits contain the routine maintenance parts that should be periodically checked or replaced. This kit doesn't contain any internal replacement pump parts.

Tune-up kits contain: A set of cutting blocks, the cap bolts and lock washers for fastening the cutting blocks, a quart of hydraulic oil, a stopper bolt with spring, a set of the electrical motor carbon brushes and a cutter handling instruction booklet.

Available Rebar Cutter Tune-Up Kits #	
TU16LY-K	Tune-up kit for DCC-16LY cordless rebar cutter
TU16LZ-K	Tune-up kit for DC-16LZ electric rebar cutter
TU16K	Tune-up kit for DC-16W electric rebar cutter
TU20K	Tune-up kit for DC-20XH & WH electric rebar cutters
TU25K	Tune-up kit for DC-25X electric rebar cutter
TU32WH	Tune-up kit for DC-32WH electric rebar cutter

Our Manufacturers Representatives:



W.G. WRIGHT

Territory: AK, WA, OR, MT & ID
503-232-3480
Fax: 503-232-0401
www.wgwright.com

LARRABEE COMPANY

Territory: Northern CA, Northern NV & HI
800-260-9430
Fax: 510-785-6483
www.larrabeeco.com

EBBERT CO.

Territory: Southern CA & South NV
800-EBBERTS
Fax: 714-437-5322
Email: rle@ebbertco.com

MCCLELLAND MARKETING

Territory: ND, SD, MN, IA, NE, KS & MO
800-444-0490
Fax: 636-376-1404
www.mmktinc.com

LEW HUDSON SALES

Territory: AR, LA, OK, TX, WY, UT, CO, AZ, NM, FL, GA, AI, SC, NC, TN & MS
800-394-6443
Fax: 770-682-2997
www.lewhudson.com

M.J. MILLER

Territory: IL, IN, KY, MI, OH, WI & WV
815-790-8437
Fax: 772-287-8356
www.mjmillerc.com

CARDINAL SALES

Territory: ME, VT, NH, MA, CT, RI, NY, NJ, PA, MD, DE, VA & Washington D.C.
800-222-4344
Fax: 718-745-4030
www.cardinalreps.com

BORDERLAND ENTERPRISES

Territory: Mexico, Belize, Guatemala, El Salvador, Honduras, Nicaragua, Costa Rica, Panama, Ecuador & Peru.
623-935-3090 (USA)
Fax: 623-935-9577 (USA)
www.borderlandexport.com

JMC INTERNATIONAL

Territory: Columbia, Puerto Rico, Dominican Republic & The Virgin Islands
787-487-9294 (PR)
Fax: 787-785-4142 (PR)
Email: jmascs@prtc.net

• • • • •

BENNER-NAWMAN, INC.

3450 Sabin Brown Road
Wickenburg, AZ 85390
(800) 992-3833
Fax: (928) 684-7041
Email: mail@bnproducts.com
www.bnrebartools.com



Benner-Nawman, Inc.

3450 Sabin Brown Road
Wickenburg, AZ 85390

(800) 992-3833

(928) 684-2813

Fax: (928) 684-7041

mail@bnproducts.com

bnrebartools.com

